
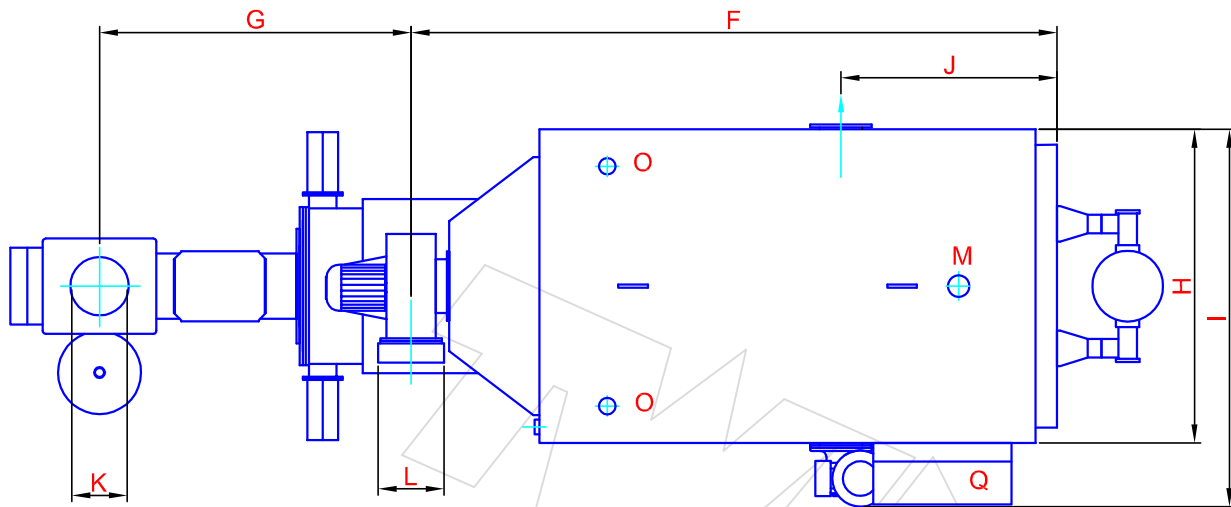


# TYPE CS120i - CS150i - CS250i

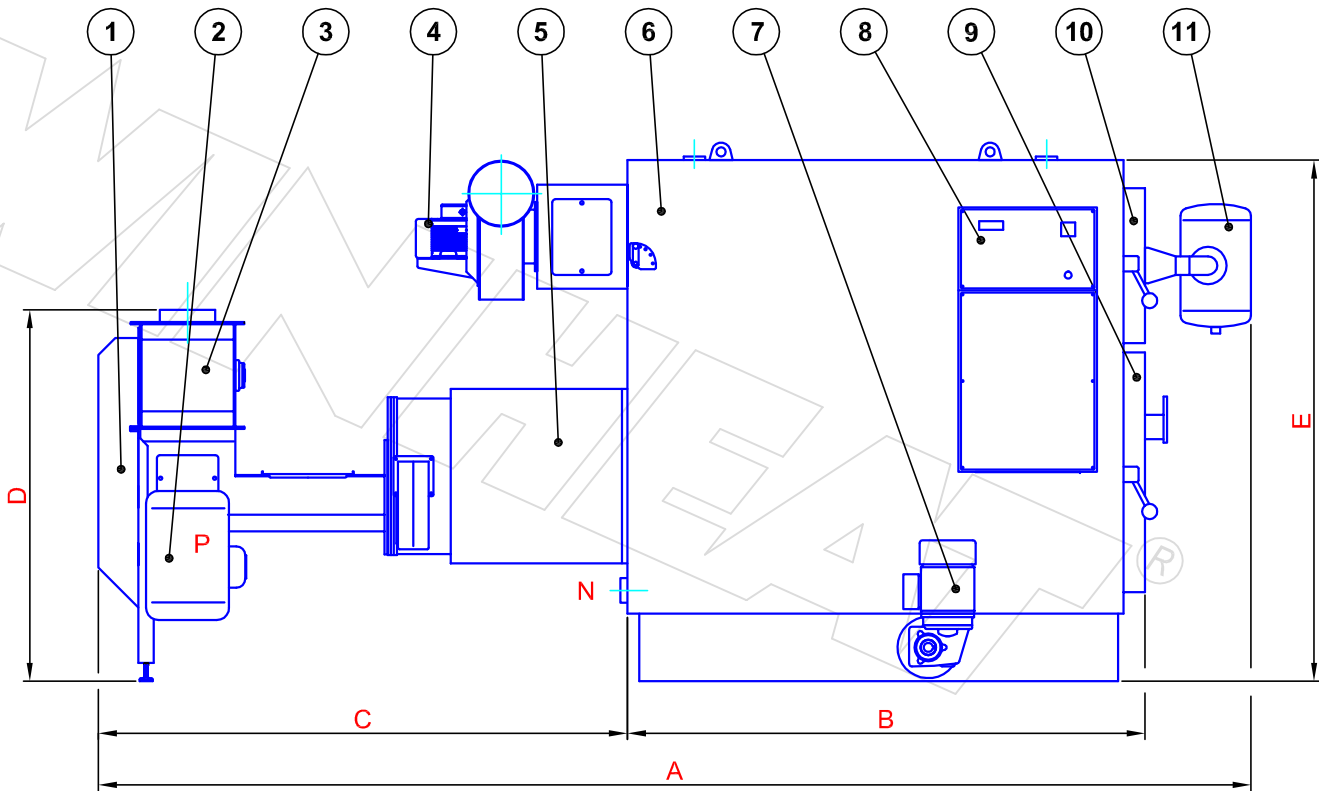

- |                    |                |                |                          |
|--------------------|----------------|----------------|--------------------------|
| 1. Stoker unit     | 4. Fluegas fan | 7. De ashing*  | 10. Cleaning door        |
| 2. Sprinklersystem | 5. Burner tube | 8. Controller  | 11. Aut. cleaningsystem* |
| 3. Rotating valve  | 6. Boiler unit | 9. Boiler door |                          |

Type	Dimensions										Connections						
	A	B	C	D	E	F	G	H	I	J	K Auger con.	L Flue spigot	M Flow	N Return	O Expansion	P Sprinkler	Q Electrical con.
CS 120i	3310	1645	1320	1200	1536	2060	615	966	1176	620		Ø213	G2"	G2"			
CS 150i	3760	1690	1720	1200	1700	2115	1010	1020	1230	710	Ø180	Ø213	G2"	G2"	G1¼"	G½"	3 phase 400V 16A
CS 250i	4280	2090	1840	1200	1700	2515	1130	1020	1230	920		Ø248	G2½"	G2½"			

Dimensions I mm. - \*Extra accessories

Twin Heat A/S • Nørrevangen 7 • DK9631 Gedsted  
Mail: twinheat@twinheat.dk • www.twinheat.dk

We reserve the rights to make changes - Juli 2010