


# Transport auger ST05

The shape of the auger channel makes it suitable when using wood chips, wood shavings, saw dust and more biofuels that normally would 'pack' in a conventional round transport auger.

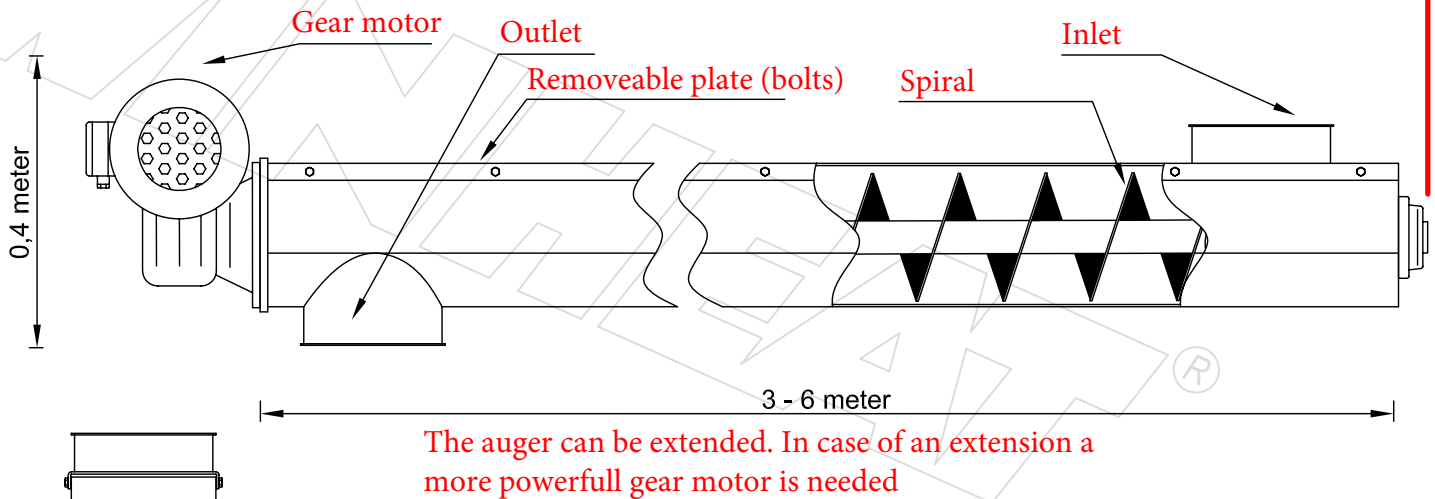

The auger can be extended. In case of an extension a more powerful gear motor is needed

Seen from inlet side. Without gear motor and bearing

## Technical Data

Mains connection	3 x 400V+0+PE, 10A
Inlet / Outlet	OK180 / Ø180mm
Capacity	Depends on the fuel type
Suitable fuel types	Wood chips, wood shavings, sawdust and more
Gear motor	Nordgear: 1,1 kW. 29 o/min

Twinheat A/S, Nørrevangen 7, 9631 Gedsted  
Tlf. +45 9864 5222, Fax. 98645244  
Mail. [twinheat@twinheat.dk](mailto:twinheat@twinheat.dk), [www.twinheat.dk](http://www.twinheat.dk)